





CATEGORY 6 U/UTP PATCH CABLE 4 PAIR (AWG 24) LSOH

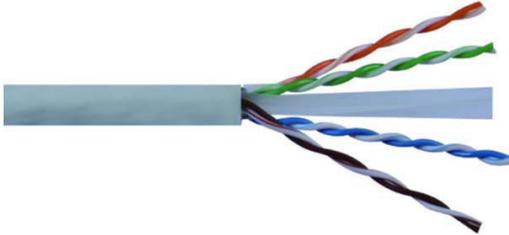

Wave Cables Cat. 6 U/UTP cables are designed to meet the most advanced U/UTP cable applications. Tested to 250MHz, the performance of this cable meets the requirements for PS-NEXT, attenuation, return loss, attenuation-to-crosstalk ratio (ACR) and impedance, making it ideal for high-end transmission links supporting today's networking protocols. Low smoke zero halogen is becoming very popular and, in some cases, a requirement where the protection of people and equipment from toxic and corrosive gas is critical.

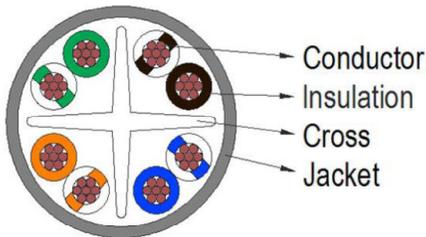

Construction

Twisted Pairs Color Code:
PAIR 1: Blue, White/Blue
PAIR 2: Orange, White/Orange
PAIR 3: Green; White/Green
PAIR 4: Brown; White/Brown

Component

Conductor: AWG 24, $7 \times 0.192 \pm 0.005$ mm
Insulators: HDPE (Min. Thickness 0.153, Min. Avg. thickness 0.178)
Insulators Diameter: 0.98 ± 0.01 mm
Jacket: LSOH (Min. Thickness 0.58, Min. Avg. thickness 0.51)
Jacket Diameter: 5.8 ± 0.2 mm

Marking

Wave Cables U/UTP STRANDED CABLE 24AWG 4PR CAT.6 LSOH

Physical Characteristics

Un-aged:
Tensile strength: Polyolefin 2400PSI, Jacket (LSOH) 2000PSI
Elongation: Polyolefin 300% min. Jacket (LSOH) 100% min
After Aging:
Tensile strength: Polyolefin 75%min. Jacket (LSOH) 85% min
Elongation: Polyolefin 75%min. Jacket (LSOH) 50% min

CONSTRUCTION

24AWG bare copper wire insulated with polyethylene. Two insulated conductors twisted together to form a pair and four such pairs cabled to form the basic unit LSOH jacketed with flame-retardant sheath. Plastic cross in the middle separates pairs from each other.

APPLICATIONS

Category 6 U/UTP cable is intended for high speed data applications including: IEEE 802.3 1000BASE-T, 10BASE-T, 155 Mb/s ATM, 4/16 Mb/s Token Ring

FEATURES

- Specified and tested to 250 MHz
- Small, round design pairs
- LSOH sheath

BENEFITS

- Reliably supports today's network protocols
- Reduced installation costs and maintenance
- Lower Bit Error Rates, increases network efficiency and uptime
- Limited emission of smoke and no halogen when exposed to high sources of heat

Electric Characteristics

Voltage rating: 300V
Temperature rating: 75°C
Dielectric strength: DC 2.5 KV / 2sec. or AC1.75 KV / 2sec.
Mutual Capacitance: 5.6 nF/100M nom.
Pair to ground : 330pF/100m max
Conductor DC resistance: 89 Ohms/km max. at 20°C.
DC Resistance Unbalance: 5% max.
Characteristic Impedance: 100 ± 15 Ohms 1~100MHz
Propagation Delay skew: 45ns/100m max.
Velocity of Propagation: 70%



CATEGORY 6 U/UTP PATCH CABLE 4 PAIR (AWG 24) LSOH

Transmission Characteristics

FREQ	Attenuation	RL	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT	Prop. DELAY
MHz	max. dB/100m	min. dB at 20°C	min. dB	min. dB	min. dB	min. dB	max. ns at 20°C
1	2.4	20.0	74.3	72.3	67.8	64.8	570
4	4.5	23.0	65.3	63.3	55.8	52.8	552
8	6.4	24.5	60.8	58.8	49.7	46.7	547
10	7.1	25.0	59.3	57.3	47.8	44.8	545
16	9.1	25.0	56.2	54.2	43.7	40.7	543
20	10.2	25.0	54.8	52.8	41.8	38.8	542
25	11.4	24.2	53.3	51.3	39.8	36.8	541
31.25	12.8	23.3	51.9	49.9	37.9	34.9	540
62.50	18.5	20.7	47.4	45.4	31.9	28.9	539
100	23.8	19.0	44.3	42.3	27.8	24.8	538
200	34.8	16.4	39.8	37.8	21.8	18.8	537
250	39.4	15.6	38.3	36.3	19.8	16.8	536