



Access control

Monitoring your infrastructure 24/7


VUTLAN

VT485r / OSDPv2 reader extension slot

Connect up to 4 readers


Allows to connect readers up to 1000m

Can be connected to VT335t, VT825t, and VT855t Vutlan monitoring systems

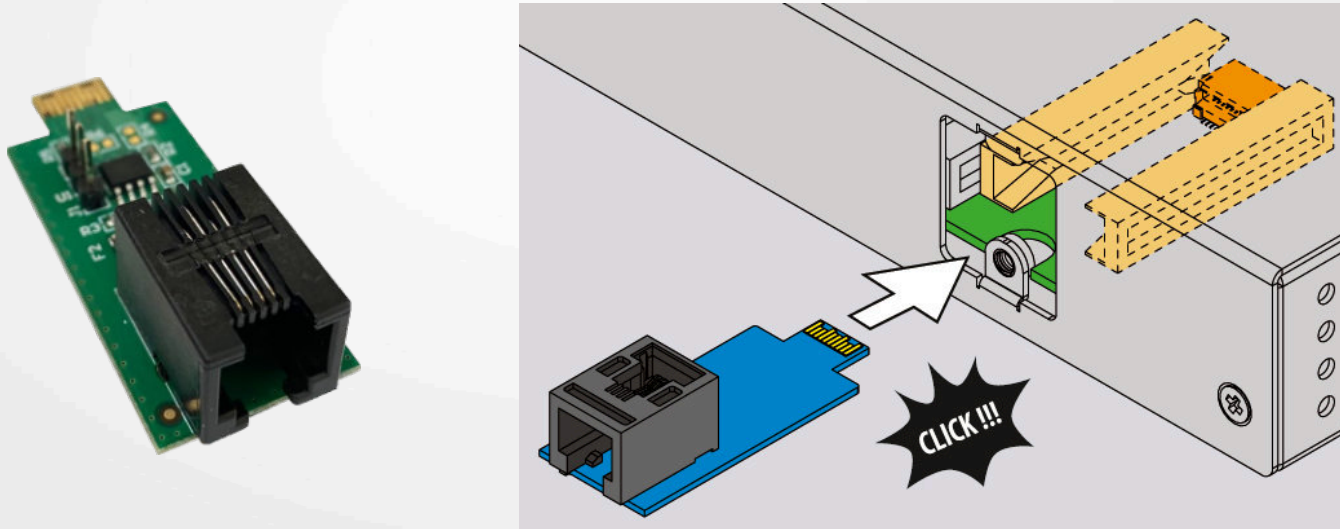


SE mini / reader

Read mobile and RFID cards
Up to 1000m

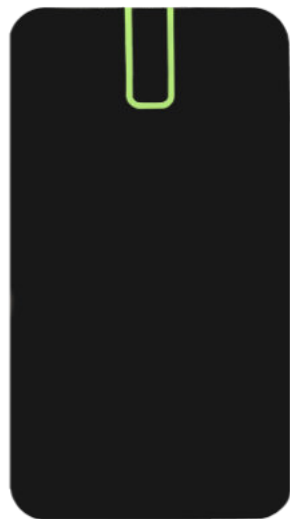


Reads	- Mifare, 13.56 MHz, ISO14443A, 4, 7, 10 bytes - UID: Mifare Classic 1K/4K, Mifare Standard, Mifare Ultralight, Mifare Hi-Memory, Mifare Plus S 2K, Mifare Plus S 4K, Mifare Plus E 1K, Mifare SE 1K, Mifare X 4K, Mifare Plus X 2K, Mifare Plus X 2K, Mifare Plus EV1 2K, Mifare Plus EV1 4K, Mifare DESfire, Mifare DESfire EV1, Mifare DESfire EV2 - NFC, 13.56, ISO 14443/15693 - NFCm 13.56 MHz, ISO 14443/15693; - RFID, 125 kHz: ASK and SK; - 2.4 GHz mobile ID
Read range	NFC, Mifare and RFID 125 kHz - up to 5 cm, 2.4 GHz radio - adjustable 10cm - 15 m
Interface	OSDP, OSDPv2
Ambient	IP65, -40°C to +60°C
Power	+9...+15 VDC, consumption < 80mA
Wiring, distance	8 wire cable, OSDP - up to 1000 m
Warranty	2 years after the purchase date

Connecting multiple SE mini readers via VT485r / Reader extension _____

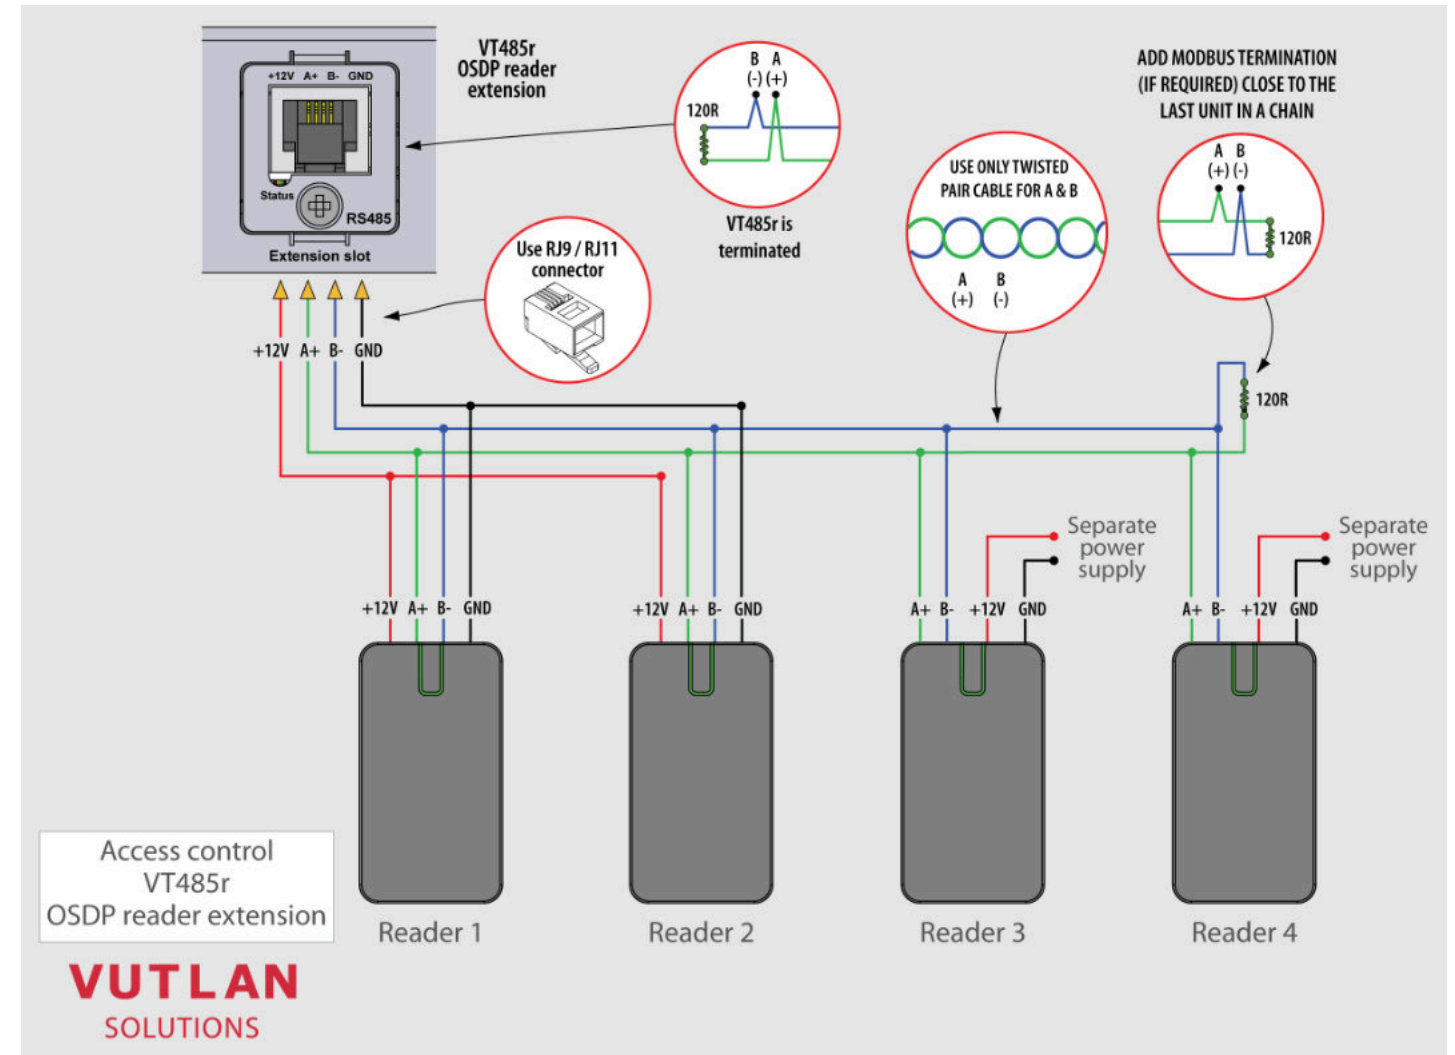

Connecting SE mini reader to VT335t monitoring unit

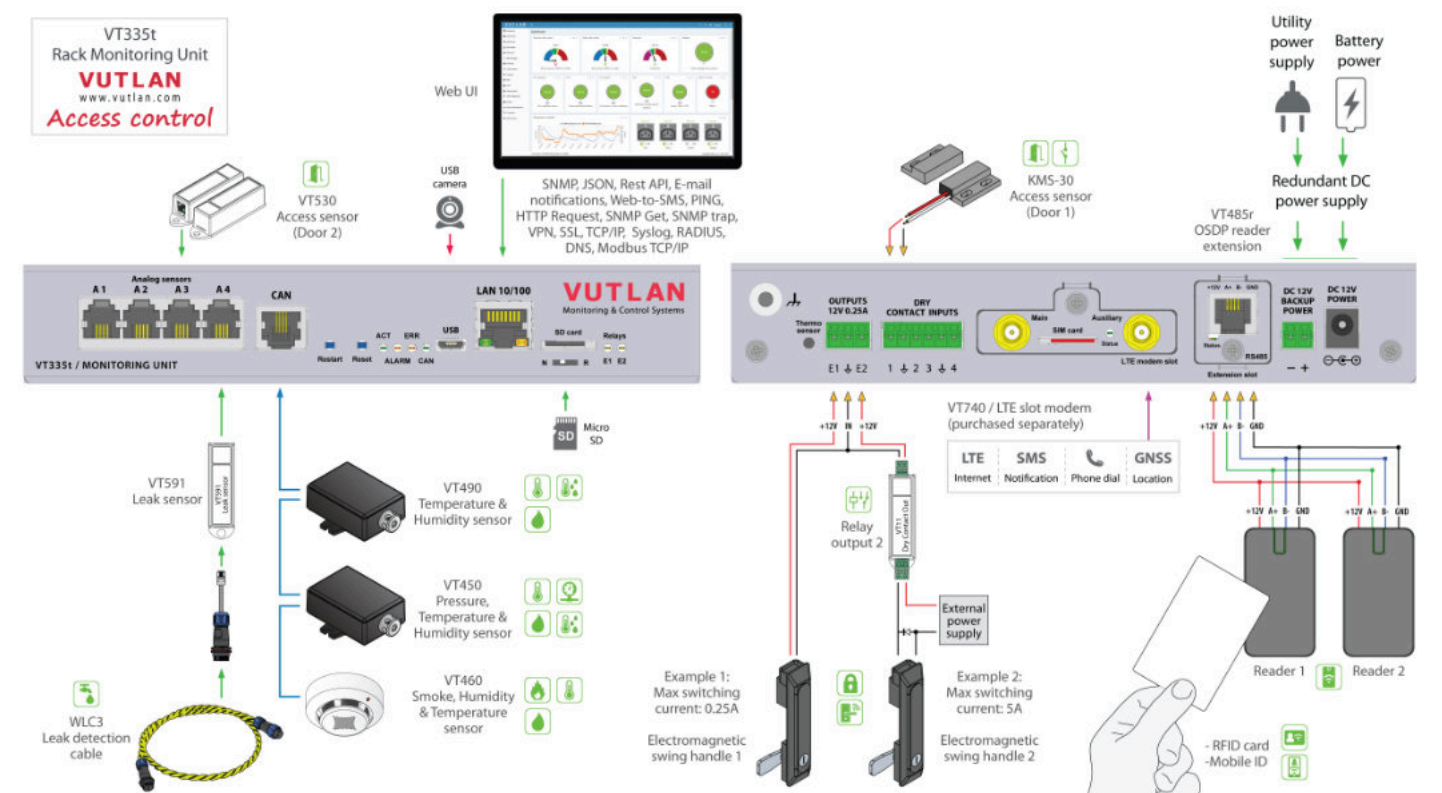




Vutlan

Partner Network

Vutlan is working with Distributors,
Solution Providers and Integrators
all around the world.

65+
PARTNERS

+37
COUNTRIES

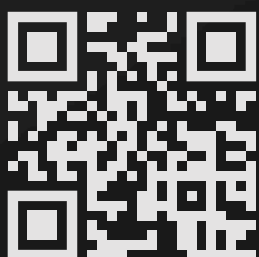

Vutlan s.r.o. (LTD)
43 ul.Svornosti,
82106, Bratislava,
Slovak Republic, EU
sales@vutlan.com
www.vutlan.com

VUTLAN